

# Leica Zeno FLX100 Smart Antenna



User Manual  
Version 1.0  
English

- when it has to be **right**

**Leica**  
Geosystems

PART OF  
**HEXAGON**

# Introduction

## Purchase

Congratulations on the purchase of the Leica Zeno FLX100 Smart Antenna.



This manual contains important safety directions as well as instructions for setting up the product and operating it. Refer to [1 Safety Directions](#) for further information.

Read carefully through the User Manual before you switch on the product.

## Product identification

The model and serial number of your product are indicated on the type plate. Always refer to this information when you need to contact your agency or Leica Geosystems authorised service centre.

## Trademarks

- *Bluetooth*<sup>®</sup> is a registered trademark of Bluetooth SIG, Inc. All other trademarks are the property of their respective owners.

## Validity of this manual

This manual applies to the Leica FLX100 smart antenna.

## Available documentation

Name	Description/Format		
Quick Start Video QR code			
Leica FLX100 smart antenna Quick Guide	Provides an overview of the product together with technical data and safety directions. Intended as a quick reference guide.	✓	✓
Leica FLX100 smart antenna User Manual	All instructions required in order to operate the product to a basic level are contained in the User Manual. Provides an overview of the product together with technical data and safety directions.	-	✓

### Refer to the myWorld web page for all Leica FLX100 smart antenna documentation/software:

- <https://myworld.leica-geosystems.com>



myWorld@Leica Geosystems (<https://myworld.leica-geosystems.com>) offers a wide range of services, information and training material.

With direct access to myWorld, you are able to access all relevant services whenever it is convenient for you.

Service	Description
myProducts	Add all products that you and your company own and explore your world of Leica Geosystems: View detailed information on your products and update your products with the latest software and keep up-to-date with the latest documentation.
myService	View the current service status and full service history of your products in Leica Geosystems service centres. Access detailed information on the services performed and download your latest calibration certificates and service reports.
mySupport	Create new support requests for your products that will be answered by your local Leica Geosystems Support Team. View the complete history of your support requests and view detailed information on each request in case you want to refer to previous support requests.
myLearning	Welcome to the home of Leica Geosystems online learning! There are numerous online courses – available to all customers with products that have valid CCPs (Customer Care Packages).
myTrustedServices	Add your subscriptions and manage users for Leica Geosystems Trusted Services, the secure software services, that assist you to optimise your workflow and increase your efficiency.
mySmartNet	HxGN SmartNet is the GNSS correction service built on the world's largest reference station network, enabling GNSS-capable devices to quickly determine precise positions in the range of one to two centimetre accuracy. The service is provided 24/7 by a highly-available infrastructure and professional support team with more than 10 years of experience reliably delivering the service.
myDownloads	Downloads of software, manuals, tools, training material and news for Leica Geosystems products.

# Table of Contents

---

<b>1</b>	<b>Safety Directions</b>	<b>5</b>
1.1	General Introduction	5
1.2	Definition of Use	6
1.3	Limits of Use	6
1.4	Responsibilities	6
1.5	Hazards of Use	7
1.6	FCC Statement, Applicable in U.S.	11
1.7	ISED Statements (EN/FR), Applicable in Canada	12
<b>2</b>	<b>Description of the System</b>	<b>13</b>
2.1	General Information	13
2.2	Instrument Components	14
2.3	Accessories	15
<b>3</b>	<b>Operation</b>	<b>16</b>
3.1	Power On/Off, Reset, Charging	16
3.2	Setups for the FLX100 Smart Antenna	16
3.3	Phase Centre of the FLX100 Smart Antenna	18
3.4	Setting of the FLX100 Smart Antenna	18
3.5	Configure Real-time Corrections	19
3.6	Firmware Upload	20
<b>4</b>	<b>Care and Transport</b>	<b>21</b>
4.1	Transport	21
4.2	Storage	21
4.3	Cleaning and Drying	22
<b>5</b>	<b>Technical Data</b>	<b>23</b>
5.1	Accessories	24
5.2	Conformity to National Regulations	25
5.2.1	Dangerous Goods Regulations	25
<b>6</b>	<b>Leica FLX100 smart antenna Bundle</b>	<b>26</b>
6.1	Standard Configuration	26
6.2	Accessories	26
6.3	Packages for the FLX100 Smart Antenna	27
<b>7</b>	<b>Software Licence Agreement/Warranty</b>	<b>29</b>

---

# 1 Safety Directions

## 1.1 General Introduction

### Description

The following directions enable the person responsible for the product, and the person who actually uses the equipment, to anticipate and avoid operational hazards.

The person responsible for the product must ensure that all users understand these directions and adhere to them.

### About warning messages

Warning messages are an essential part of the safety concept of the instrument. They appear wherever hazards or hazardous situations can occur.

#### Warning messages...

- make the user alert about direct and indirect hazards concerning the use of the product.
- contain general rules of behaviour.

For the users' safety, all safety instructions and safety messages shall be strictly observed and followed! Therefore, the manual must always be available to all persons performing any tasks described here.

**DANGER, WARNING, CAUTION** and **NOTICE** are standardised signal words for identifying levels of hazards and risks related to personal injury and property damage. For your safety, it is important to read and fully understand the following table with the different signal words and their definitions! Supplementary safety information symbols may be placed within a warning message as well as supplementary text.

Type	Description
 <b>DANGER</b>	Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.
 <b>WARNING</b>	Indicates a potentially hazardous situation or an unintended use which, if not avoided, could result in death or serious injury.
 <b>CAUTION</b>	Indicates a potentially hazardous situation or an unintended use which, if not avoided, may result in minor or moderate injury.
<b>NOTICE</b>	Indicates a potentially hazardous situation or an unintended use which, if not avoided, may result in appreciable material, financial and environmental damage.
	Important paragraphs which must be adhered to in practice as they enable the product to be used in a technically correct and efficient manner.

## 1.2

### Definition of Use

---

#### Intended use

- Carrying out measurement tasks using various GNSS measuring techniques
  - Computing with software
  - Data communication with external appliances
  - Data transfer with Bluetooth®
  - Measuring coordinates
  - Measuring raw data and computing coordinates using carrier phase and code signal from GNSS satellites (GNSS systems)
  - Recording GNSS and point related data
  - Recording measurements
- 

#### Reasonably foreseeable misuse

- Use of the product without instruction
  - Use outside of the intended use and limits
  - Disabling safety systems
  - Removal of hazard notices
  - Opening the product using tools, for example screwdriver, unless this is permitted for certain functions
  - Modification or conversion of the product
  - Use after misappropriation
  - Use of products with recognisable damage or defects
  - Use with accessories from other manufacturers without the prior explicit approval of Leica Geosystems
  - Inadequate safeguards at the working site
- 

## 1.3

### Limits of Use

---

#### Environment

Suitable for use in an atmosphere appropriate for permanent human habitation. Not suitable for use in aggressive or explosive environments.

---

#### **WARNING**

#### **Working in hazardous areas, or close to electrical installations or similar situations**

Life Risk.

#### **Precautions:**

- ▶ Local safety authorities and safety experts must be contacted by the person responsible for the product before working in such conditions.
- 

## 1.4

### Responsibilities

---

#### Manufacturer of the product

Leica Geosystems AG, CH-9435 Heerbrugg, hereinafter referred to as Leica Geosystems, is responsible for supplying the product, including the User Manual and original accessories, in a safe condition.

---

## Person responsible for the product

The person responsible for the product has the following duties:

- To understand the safety instructions on the product and the instructions in the User Manual
- To ensure that it is used in accordance with the instructions
- To be familiar with local regulations relating to safety and accident prevention
- To inform Leica Geosystems immediately if the product and the application become unsafe
- To ensure that the national laws, regulations and conditions for the operation of the product are respected

## 1.5

### Hazards of Use

#### DANGER

#### Risk of being struck by lightning

If the product is used with accessories, for example on masts, staffs, poles, you may increase the risk of being struck by lightning. Danger from high voltages also exists near power lines. Lightning, voltage peaks, or the touching of power lines can cause damage, injury and death.

#### Precautions:

- ▶ Do not use the product in a thunderstorm as you can increase the risk of being struck by lightning.
- ▶ Be sure to remain at a safe distance from electrical installations. Do not use the product directly under or close to power lines. If it is essential to work in such an environment contact the safety authorities responsible for electrical installations and follow their instructions.
- ▶ If the product has to be permanently mounted in an exposed location, it is advisable to provide a lightning conductor system. A suggestion on how to design a lightning conductor for the product is given below. Always follow the regulations in force in your country regarding grounding antennas and masts. These installations must be carried out by an authorised specialist.
- ▶ To prevent damages due to indirect lightning strikes (voltage spikes) cables, for example for antenna, power source or modem should be protected with appropriate protection elements, like a lightning arrester. These installations must be carried out by an authorised specialist.
- ▶ If there is a risk of a thunderstorm, or if the equipment is to remain unused and unattended for a long period, protect your product additionally by unplugging all systems components and disconnecting all connecting cables and supply cables, for example, instrument - antenna.

## DANGER

### Risk of electrocution

Because of the risk of electrocution, it is dangerous to use poles, levelling staffs and extensions in the vicinity of electrical installations such as power cables or electrical railways.

#### Precautions:

- ▶ Keep at a safe distance from electrical installations. If it is essential to work in this environment, first contact the safety authorities responsible for the electrical installations and follow their instructions.



## WARNING

### Improperly dispose of product

If the product is improperly disposed of, the following can happen:

- If polymer parts are burnt, poisonous gases are produced which may impair health.
- If batteries are damaged or are heated strongly, they can explode and cause poisoning, burning, corrosion or environmental contamination.
- By disposing of the product irresponsibly you may enable unauthorised persons to use it in contravention of the regulations, exposing themselves and third parties to the risk of severe injury and rendering the environment liable to contamination.

#### Precautions:

- ▶



The product must not be disposed with household waste. Dispose of the product appropriately in accordance with the national regulations in force in your country. Always prevent access to the product by unauthorised personnel.

## WARNING

### Distraction or loss of attention

During dynamic applications there is a danger of accidents occurring if the user does not pay attention to the environmental conditions around, for example obstacles, excavations or traffic.

#### Precautions:

- ▶ The person responsible for the product must make all users fully aware of the existing dangers.

## WARNING

### Lightning strike

If the product is used with accessories, for example masts, staffs, poles, you may increase the risk of being struck by lightning.

#### Precautions:

- ▶ Do not use the product in a thunderstorm.

**⚠ WARNING**

**Inadequate securing of the working site**

This can lead to dangerous situations, for example in traffic, on building sites and at industrial installations.

**Precautions:**

- ▶ Always ensure that the working site is adequately secured.
- ▶ Adhere to the regulations governing safety, accident prevention and road traffic.

**⚠ WARNING**

**Improperly repaired equipment**

Risk of injuries to users and equipment destruction due to lack of repair knowledge.

**Precautions:**

- ▶ Only authorised Leica Geosystems Service Centres are entitled to repair these products.

**For the AC/DC power supply:**

**⚠ WARNING**

**Electric shock due to missing ground connection**

If unit is not connected to ground, death or serious injury can occur.

**Precautions:**

- ▶ The power cable and power outlet must be grounded!



**For the AC/DC power supply and the battery charger:**

**⚠ WARNING**

**Electric shock due to use under wet and severe conditions**

If unit becomes wet it may cause you to receive an electric shock.

**Precautions:**

- ▶ If the product becomes humid, it must not be used!
- ▶ Use the product only in dry environments, for example in buildings or vehicles.



- ▶ Protect the product against humidity.

## For the AC/DC power supply and the battery charger:

### **WARNING**

#### **Unauthorised opening of the product**

Either of the following actions may cause you to receive an electric shock:

- Touching live components
- Using the product after incorrect attempts were made to carry out repairs.

#### **Precautions:**

- ▶ Do not open the product!
  - ▶ Only Leica Geosystems authorised service centres are entitled to repair these products.
- 

### **CAUTION**

#### **Unapproved chargers or cables**

Connecting the charger improperly may cause serious damage to the device. Any damage caused by misuse is not covered by the warranty. Unapproved chargers or cables can cause the battery to explode or damage the device.

#### **Precautions:**

- ▶ Use only Leica-approved chargers, batteries, and cables.
- 

### **CAUTION**

#### **Keeping the device too close to the human body during operation**

Health risk

#### **Precautions:**

- ▶ Use the device at least 10 mm apart from the human body.
  - ▶ This device has been tested for typical operations near the human body, for example handheld mode, with the device kept at 10 mm from the user's body.
- 

### **CAUTION**

#### **Not properly secured accessories**

If the accessories used with the product are not properly secured and the product is subjected to mechanical shock, for example blows or falling, the product may be damaged or people can sustain injury.

#### **Precautions:**

- ▶ When setting up the product, make sure that the accessories are correctly adapted, fitted, secured, and locked in position.
  - ▶ Avoid subjecting the product to mechanical stress.
- 

### **CAUTION**

#### **Dropping the product**

When being dropped, the product can cause personal injury and/or mechanical damage.

#### **Precautions:**

- ▶ Ensure to have a firm grip on the product before operating it.
-

---

**⚠ CAUTION**

Before any cleaning procedure, ensure that the instrument is switched off and the battery has been removed.

---

**⚠ CAUTION**

Unused connectors must be protected using the attached dust cap.

---

**NOTICE**

Rooting your Android device will void your right for any warranty services and support by Leica!

---

**1.6****FCC Statement, Applicable in U.S.**

---

**⚠ WARNING**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and the receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.
- 

**⚠ CAUTION**

Changes or modifications not expressly approved by Leica Geosystems for compliance could void the user's authority to operate the equipment.

---

## Labelling Leica FLX100 smart antenna



0021266\_001

## 1.7

### ISED Statements (EN/FR), Applicable in Canada

#### WARNING

This Class (B) digital apparatus complies with Canadian ICES-003.  
Cet appareil numérique de la classe (B) est conforme à la norme NMB-003 du Canada.

#### Canada Compliance Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

#### Canada Déclaration de Conformité

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

## Radio Frequency (RF) Exposure Compliance Statement

The radiated RF output power of the instrument is below the Health Canada's Safety Code 6 exclusion limit for portable devices (radiated element separation distance between the radiating element and user and/or bystander is below 20 cm).

## 2

## Description of the System

---

### 2.1

### General Information

---

#### Design

The instrument

- Four satellite-system (BeiDou, GPS, GLONASS, Galileo), support access to external differential signal to get typical < 2 cm (2D) positioning results
  - FLX100 smart antenna with integrated helix antenna and Bluetooth capability
  - Small and lightweight, wearable
  - Low power consumption, long battery duration
  - Rubber bumper for drop protection
  - Is designed to be used on the pole or on the Universal Handheld Tray. It calculates a position from the computed ranges to all visible and activated GNSS satellites
  - Can communicate with Leica Zeno GIS software:
    - Zeno Mobile,
    - Zeno Connect: compatible with Windows 10 and Android version > 4.1
  - Install Zeno Connect to use third-party applications
-

## 2.2

## Instrument Components

### Description



21274\_001

- a Connection LED – flashes blue when Bluetooth connected
- b GNSS correction indicator – flashes green when receiving correction data
- c Satellite LED – flashes green when position available
- d Battery LED indicator
  - Solid green during normal operation
  - Flashing red when power < 10%
  - Solid red when charging
  - Solid green when fully charged
- e Power button to turn on/off the receiver
- f Holes for the screws to fix the pole adapter
- g USB type-C port supports USB 2.0

## 2.3

## Accessories

### Operation with pole

Pole setup



21300\_001

- a Leica FLX100 smart antenna
- b AZ219 Pole Mount
- c GLS30 Carbon Pole

### Operation with smartphone

Using the AZ220 Universal Handheld Tray for FLX100 smart antenna



21301\_002

- a Leica FLX100 smart antenna
- b AZ220 Universal Handheld Tray
- c Smartphone

### Operation with tablet

Using the AZ220 Universal Handheld Tray for FLX100 smart antenna



21301\_002

- a Leica FLX100 smart antenna
- b AZ220 Universal Handheld Tray
- c Tablet
- d AZ223 Rubber tether for Tablet Mounts

### 3 Operation

#### 3.1 Power On/Off, Reset, Charging

##### Description



- a Power on/off button
- b Battery LED indicator


Function	Description
Power on/off	<b>Turn on:</b> Press and hold the power button until the battery LED goes green and the device sounds a beep.  The device starts booting after the first beep. Once it booted up, the device sounds a second beep. <b>Turn off:</b> Press and hold the power button until the battery LED goes out and the device sounds a beep.
Charging	Use the standard charger and type-C data cable to charge. The battery LED indicator is red while charging and green when charging is finished.

#### 3.2 Setups for the FLX100 Smart Antenna

##### Setup on a pole

To attach the FLX100 smart antenna on the top of a pole, the pole mount adapter is required - Art. 915867.

Follow these steps to connect the FLX100 smart antenna to the pole.

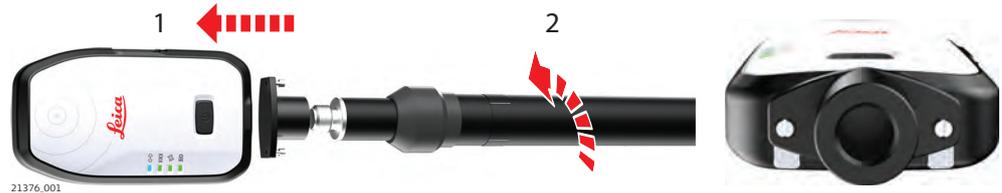

1. Use a slot screwdriver to fix the pole mount adapter with both screws to the FLX100 smart antenna.  
 Make sure to fix the pole mount adapter in the correct orientation.
2. Screw the pole clockwise into the pole mount adapter.

## Setup with Universal Handheld Tray

Use the Universal Handheld Tray to attach the FLX100 smart antenna with phone/tablet - Art. 915868.

The Universal Handheld Tray keeps the FLX100 smart antenna and phone/tablet together. This setup maximises the productivity in the field. The Universal Handheld Tray has a spring-loaded frame to hold a phone/tablet of different sizes.

Example:  
Smartphone



Example:  
Tablet



### 3.3

## Phase Centre of the FLX100 Smart Antenna

### Phase centre

The phase centre of the FLX100 smart antenna location is at the dot near the top of the device.

### Pole mode

In pole mode, the offset from the phase centre to the top of the pole, including the pole adapter mount, is automatically accounted. Make sure to provide the appropriate antenna height in the software.

### Handheld mode

In handheld mode, the location is measured at the dot. Make sure the FLX100 smart antenna is placed properly.



Make sure that Pole or Handheld mode are set correctly in Zeno Mobile/Zeno Connect settings to change the phase centre position.



a Phase centre position

### 3.4

## Setting of the FLX100 Smart Antenna

### Step-by-step

1. Access the FLX100 smart antenna settings.

In <b>Zeno Mobile</b>	1. Go to <b>Settings</b> within a project. 2. Access <b>GPS</b> and then <b>Antenna</b>
In <b>Zeno Connect</b>	1. Open the app and go to <b>Antenna</b>
2. Tap on the three dots next to the FLX100 smart antenna.
3. Configure the FLX100 smart antenna, The following settings are available:
  - Antenna Height (Only in Zeno Mobile)
  - Antenna Usage
  - Reset Antenna
  - Upgrade Antenna
  - Info



Refer to the according Zeno Mobile and Zeno Connect documentation for more information.

## 3.5

## Configure Real-time Corrections

### Step-by-step

This step-by-step procedure describes the configuration of the real-time correction in Zeno Mobile and Zeno Connect.

#### RTK Profile Wizard

- |    |  |   |
|----|--|---|
| 1. | In <b>Zeno Mobile</b>  | 1. Go to <b>Settings</b> within a project.<br>2. Access <b>GPS</b> and then <b>Realtime Corrections</b> |
|    | In <b>Zeno Connect</b>   | 1. Open the app and go to <b>Settings</b><br>2. Go to <b>Realtime Corrections</b>                       |
| 2. | Tap on <b>+</b> in the top-right corner of the screen to start the RTK profile wizard.   |   |
| 3. | Enter profile details.<br> Provide a name and, optionally, a description for the new profile.   |   |
| 4. | Tap <b>Next</b> .  |   |
| 5. | Select profile type. <ul style="list-style-type: none"><li>• Select <b>Internet</b> for real-time corrections streamed through the Internet.</li><li>• Select <b>Radio</b> or <b>Beacon</b> if using an external radio receiver.</li></ul> |   |
| 6. | Tap <b>Next</b> .  |   |

#### Create Data Server

- |    |  |
|----|--|
| 1. | Tap on <b>+</b> to create a data server.   |
| 2. | Add the corresponding details and credentials for the data server that is providing the real-time corrections. |
| 3. | Tap <b>Next</b> .  |

#### Select Mountpoint

- |    |  |
|----|--|
| 1. | Tap on the file icon to fetch the Mountpoint list from the server. An active Internet connection is required. Otherwise, manually insert the Mountpoint name.                                  |
| 2. | Tap <b>Next</b> .  |
| 3. | Set the <b>RTK Correction Detail</b> .<br>To do so, select the corresponding: <ul style="list-style-type: none"><li>• Data Format</li><li>• Network Type</li><li>• Reference Antenna</li></ul> |
| 4. | Tap <b>Finish</b> .  |

#### Wizard end

At the end of the wizard, the connection to the correction server is tested to verify the correct configuration.

It is possible to save the profile independently of the connection test result.

#### Further configuration

Access again the **Realtime Corrections** menu to access the profiles. Modify any detail by tapping on the three dots next to the profile name.

When position is available, activate/deactivate the automatic connection to the profile here.

## 3.6

### Firmware Upload

#### Step-by-step

This step-by-step procedure describes how to upload the firmware on the FLX100 smart antenna.

#### Download Firmware

 The latest firmware is always available on myWorld.  
<https://myworld.leica-geosystems.com>

1. Download the firmware ZIP file from the FLX100 Firmware option in the Software section of the antenna in myWorld.

#### Send Firmware to FLX100 smart antenna by Bluetooth

1. Unzip the file "update.bin" to your computer.
2. Ensure the FLX100 smart antenna is turned on.
3. Right-click "update.bin".
4. Choose Send to > Bluetooth device.
5. Select the corresponding serial number of the FLX100 smart antenna in the Bluetooth File Transfer window.
6. Click Next.
7. The firmware file is sent to the FLX100 smart antenna. It takes approximately 5 minutes.
8. Click Finish in the Bluetooth File Transfer window once the transfer has completed.

#### Install Firmware

 Now the firmware file has been transferred.

1. Turn the FLX100 smart antenna off and on again.

 Once turned on again, the LEDs on the antenna flash one after the other for a few seconds.

 When the firmware has successfully installed, the LEDs stop flashing and the antenna sounds a beep.

**⚠ CAUTION****Unapproved chargers or cables**

Connecting the charger improperly may cause serious damage to the device. Any damage caused by misuse is not covered by the warranty. Unapproved chargers or cables can cause the battery to explode or damage the device.

**Precautions:**

- ▶ Use only Leica-approved chargers, batteries, and cables.

**4.1****Transport****Transport in a road vehicle**

Never carry the product loose in a road vehicle, as it can be affected by shock and vibration. Always carry the product in its container and secure it.

For products for which no container is available use the original packaging or its equivalent.

**Shipping**

When transporting the product by rail, air or sea, always use the complete original Leica Geosystems packaging, container and cardboard box, or its equivalent, to protect against shock and vibration.

**Shipping, transport of batteries**

When transporting or shipping batteries, the person responsible for the product must ensure that the applicable national and international rules and regulations are observed. Before transportation or shipping, contact your local passenger or freight transport company.

**4.2****Storage****Product**

Respect the temperature limits when storing the equipment, particularly in summer if the equipment is inside a vehicle. Refer to [5 Technical Data](#) for information about temperature limits.

**Battery care**

- A rechargeable Li-Ion battery powers the instrument. The full performance of a new battery is achieved only after two or three complete charge and discharge cycles
- The battery can be charged and discharged hundreds of times. It eventually wears out
- Do not leave a fully charged battery connected to a charger, as overcharging may shorten its life
- If left unused, a fully charged battery loses its charge over time

**Li-Ion batteries**

- Refer to [Environmental specifications](#) for information about storage temperature range
- After storage recharge batteries before using
- Protect batteries from damp and wetness. Wet or damp batteries must be dried before storing or use
- A storage temperature range of 0 °C to +30 °C / +32 °F to +86 °F in a dry environment is recommended to minimize self-discharging of the battery
- At the recommended storage temperature range, batteries containing a 40% to 50% charge can be stored for up to one year. After this storage period the batteries must be recharged

## 4.3

## Cleaning and Drying


---

### Product and accessories

- Use only a clean, soft, lint-free cloth for cleaning. If necessary, moisten the cloth with water or pure alcohol. Do not use other liquids; these may attack the polymer components.
- 

### Damp products

Dry the product, the container, the foam inserts and the accessories at a temperature not greater than 40 °C/104 °F and clean them. Do not repack until everything is dry. Always close the container when using in the field.

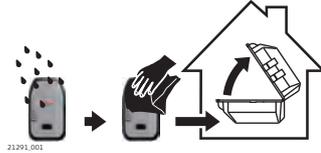

### Cables and plugs

Keep plugs clean and dry. Blow away any dirt lodged in the plugs of the connecting cables.

---

## 5

## Technical Data

### Instrument

Type	Description
Satellites tracked	GPS L1C/A, L2C QZSS L1C/A, L2C GLONASS L1OF, L2OF BeiDou B1I, B2I Galileo E1B/C, E5b
Channels	184
Update rate	Up to 10 Hz
Re-aquisition	< 2 s
RTK initialisation	Typically > 120 s
Cold start time	Typically < 24 s
Hot start	Typically < 15 s
Initialisation reliability	> 99.9%
Differential	RTCM3.3
Data format	NMEA

### Frequency band

Type	Frequency band [MHz]
FLX100 smart antenna	GPS, QZSS L1: 1575.42 GPS, QZSS L2: 1227.60 GLONASS L1: 1602.5625-1611.5 GLONASS L2: 1246.4375-1254.3 Galileo E1: 1575.42 Galileo E5b: 1207.14 BeiDou B1: 1561.098 BeiDou B2: 1207.14
Bluetooth	2402...2480

### Positioning

Accuracy and reliability are subject to satellite geometry (DOPs), multipath, refractions and obstructions. In static mode they are subject even to occupation times: the longer the Baseline, the longer the occupation time must be.

Type	Description
RTK (RMS)	Horizontal: typical < 2 cm (2D)

### Output power

Type	Output power [mW]
GNSS	Receive only
Bluetooth	5 (Class 1)

### Antenna

Type	Antenna	Gain [dBi]	Connector	Frequency band [MHz]
Bluetooth	Internal Microstrip antenna	1.0	-	-

<b>Dimensions</b>	B × H × L [mm]	80 × 32 × 139	
<b>Weight</b>	Weight [g]	313	
<b>Connector</b>	USB	1 USB Type-C connector, supports USB 2.0	
<b>Mounting</b>	Universal Handheld Tray	Snap on handheld device and Leica FLX100 smart antenna	
	Pole	Leica FLX100 smart antenna mounted on Pole Adapter/Pole	
<b>System</b>	Processor	SC20	
	RAM	512 MB DDR3	
	Storage	4/8G iNand Flash	
<b>Communication</b>	Bluetooth	BT4.2 LE	
<b>Power</b>	Internal battery	3.8 V, 6120 mAh Type-C charging, supports 1.44 A fast charge	
	Input voltage	5 V DC/2 A	
	Power consumption	1.8 W	
	Working time	> 20 hours	
	Charge time	Typically 4 hours	
<b>Environmental specifications</b>	<b>Type</b>	<b>Operating temperature [°C]</b>	<b>Storage temperature [°C]</b>
	Instrument	-40 to +65	-40 to +80
	<b>External influences</b>	<b>Protection</b>	
	Water, dust and sand	IP67	
	Humidity	Up to 100% (non-condensing)	
	Shock resistance	Designed to endure to a 2 m pole drop and 1.2 m free drop on concrete floor with no damage	
<b>5.1</b>	<b>Accessories</b>		
<b>Standard accessories</b>	USB cable, Arm/Belt pouch		
<b>Optional accessories</b>	Carbon fiber pole, telescopic pole, bracket 5/8", soft bag		
	Universal Handheld Tray		

## 5.2

## Conformity to National Regulations

---

### Conformity to national regulations

- FCC Part 15 (applicable in US)
- Hereby, Leica Geosystems AG declares that the radio equipment type FLX100 smart antenna is in compliance with Directive 2014/53/EU and other applicable European Directives.

The full text of the EU declaration of conformity is available at the following Internet address: <http://www.leica-geosystems.com/ce>.



Class 1 equipment according to European Directive 2014/53/EU (RED) can be placed on the market and be put into service without restrictions in any EEA member state.

- The conformity for countries with other national regulations not covered by the FCC part 15 or European Directive 2014/53/EU has to be approved prior to use and operation.

---

### 5.2.1

### Dangerous Goods Regulations

---

#### Dangerous Goods Regulations

Many products of Leica Geosystems are powered by Lithium batteries.

Lithium batteries can be dangerous under certain conditions and can pose a safety hazard. In certain conditions, Lithium batteries can overheat and ignite.



When carrying or shipping your Leica product with Lithium batteries onboard a commercial aircraft, you must do so in accordance with the **IATA Dangerous Goods Regulations**.



Leica Geosystems has developed **Guidelines** on "How to carry Leica products" and "How to ship Leica products" with Lithium batteries. Before any transportation of a Leica product, we ask you to consult these guidelines on our web page (<http://www.leica-geosystems.com/dgr>) to ensure that you are in accordance with the IATA Dangerous Goods Regulations and that the Leica products can be transported correctly.



Damaged or defective batteries are prohibited from being carried or transported onboard any aircraft. Therefore, ensure that the condition of any battery is safe for transportation.

---

## 6 Leica FLX100 smart antenna Bundle

### 6.1 Standard Configuration

#### Description

The following table shows all parts for the standard configuration.

Description	Qty.
Leica FLX100 smart antenna	1
Power adaptor with 4 plugs (US, UK, EU and AU)	1
USB cable Type C – Type C, 1.5 m	1
USB cable Type C – Type A, 1.5 m	1
AZ222 Arm/Belt pouch	1
Soft bag for Leica FLX100 smart antenna, black	1
Cardboard box	1



### 6.2 Accessories

#### Overview

List of accessories available for the Leica FLX100 smart antenna:

Part number	Description
AZ219	Pole Mount to attach the Leica FLX100 smart antenna with Pole
AZ220	Universal Handheld Tray
AZ221	Softbag
AZ222	Arm/Belt pouch
AZ223	Rubber tether for Tablet Mount

The Pole is an optional accessory for the Leica FLX100 smart antenna. To use the Leica FLX100 smart antenna on a Pole, the appropriate adapter is required. This mounting allows customers to use the instrument vertically for precise and stable support.



The Universal Handheld Tray is an optional accessory for the Leica FLX100 smart antenna.



## 6.3

### Packages for the FLX100 Smart Antenna

#### Overview

Part number, Package	Description
6015968 FLX100 Handheld Start package with Zeno Mobile	Leica Zeno FLX100 smart antenna including: <ul style="list-style-type: none"> <li>• Multi-constellation support, GPS, GLONASS, Galileo and BeiDou</li> <li>• Power adapter</li> <li>• Type-C charging cable</li> <li>• Type-C USB cable</li> <li>• Arm/Belt pouch arm bag</li> <li>• Soft bag</li> <li>• Universal Handheld Tray</li> <li>• <b>Zeno Mobile Professional</b> with 1-year software maintenance</li> </ul>
6015969 FLX100 Handheld Start package for third party	Leica Zeno FLX100 smart antenna including: <ul style="list-style-type: none"> <li>• Multi-constellation support, GPS, GLONASS, Galileo and BeiDou</li> <li>• Power adapter</li> <li>• Type-C charging cable</li> <li>• Type-C USB cable</li> <li>• Arm/Belt pouch arm bag</li> <li>• Soft bag</li> <li>• Universal Handheld Tray</li> <li>• Install Zeno Connect from the app stores in order to use third party software</li> </ul>

Part number, Package	Description
6015970 FLX100 Pole Start package with Zeno Mobile	Leica Zeno FLX100 smart antenna including: <ul style="list-style-type: none"> <li>• Multi-constellation support, GPS, GLONASS, Galileo and BeiDou</li> <li>• Power adapter</li> <li>• Type-C charging cable</li> <li>• Type-C USB cable</li> <li>• Arm/Belt pouch arm bag</li> <li>• Soft bag</li> <li>• <b>Zeno Tab 2</b> Android tablet</li> <li>• Pole Mount Kit for Zeno Tab 2</li> <li>• GLS30 GPS telescopic carbon fibre pole</li> <li>• 5/8 pole mount to attach a FLX100 smart antenna to a LeicaGNSS pole</li> <li>• <b>Zeno Mobile Professional</b> with 1-year software maintenance</li> </ul>
6015971 FLX100 Pole Start package for third party	Leica Zeno FLX100 smart antenna including: <ul style="list-style-type: none"> <li>• Multi-constellation support, GPS, GLONASS, Galileo and BeiDou</li> <li>• Power adapter</li> <li>• Type-C charging cable</li> <li>• Type-C USB cable</li> <li>• Arm/Belt pouch arm bag</li> <li>• Soft bag</li> <li>• <b>Zeno Tab 2</b> Android tablet</li> <li>• Pole Mount Kit for Zeno Tab 2</li> <li>• GLS30 GPS telescopic carbon fiber pole</li> <li>• 5/8 pole mount to attach a FLX100 smart antenna to a LeicaGNSS pole</li> <li>• Install Zeno Connect from the app stores in order to use third party software</li> </ul>

**International Limited Warranty**

This product is subject to the terms and conditions set out in the International Limited Warranty which you can download from the Leica Geosystems AG home page at [www.leica-geosystems.com/internationalwarranty](http://www.leica-geosystems.com/internationalwarranty) or collect from your Leica Geosystems AG distributor.

---

**Software Licence Agreement**

This product contains software that is preinstalled on the product, or that is supplied to you on a data carrier medium, or that can be downloaded by you online according to prior authorisation from Leica Geosystems. Such software is protected by copyright and other laws and its use is defined and regulated by the Leica Geosystems Software Licence Agreement, which covers aspects such as, but not limited to, Scope of the Licence, Warranty, Intellectual Property Rights, Limitation of Liability, Exclusion of other Assurances, Governing Law and Place of Jurisdiction. Please make sure, that at any time you fully comply with the terms and conditions of the Leica Geosystems Software Licence Agreement.

Such agreement is provided together with all products and can also be referred to and downloaded at the Leica Geosystems home page at <http://leica-geosystems.com/about-us/compliance-standards/legal-documents> or collected from your Leica Geosystems distributor.

You must not install or use the software unless you have read and accepted the terms and conditions of the Leica Geosystems Software Licence Agreement. Installation or use of the software or any part thereof, is deemed to be an acceptance of all the terms and conditions of such Licence Agreement. If you do not agree to all or some of the terms of such Licence Agreement, you must not download, install or use the software and you must return the unused software together with its accompanying documentation and the purchase receipt to the distributor from whom you purchased the product within ten (10) days of purchase to obtain a full refund of the purchase price.

---

**Open Source information**

The software on the product may contain copyright-protected software that is licenced under various open source licences.

Copies of the corresponding licences

- are provided together with the product (for example in the About panel of the software)
- can be downloaded on <http://opensource.leica-geosystems.com>

If foreseen in the corresponding open source licence, you may obtain the corresponding source code and other related data on <http://opensource.leica-geosystems.com>.

Contact

[opensource@leica-geosystems.com](mailto:opensource@leica-geosystems.com) in case you need additional information.

---

**922526-1.0.0en**

Original text

Published in Switzerland

© 2020 Leica Geosystems AG, Heerbrugg, Switzerland

**Leica Geosystems AG**

Heinrich-Wild-Strasse

CH-9435 Heerbrugg

Switzerland

Phone +41 71 727 31 31

**[www.leica-geosystems.com](http://www.leica-geosystems.com)**



- when it has to be **right**

***Leica***  
**Geosystems**